

08/08/00  
JC883 U.S. PTO

08-09-00

A

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. JP9-1999-0161US1 (8728-410)

First Inventor or Application Identifier Kurihara et al.

Title Touch Sensor Type Liquid Crystal Display

Express Mail Label No. EL434031630US

**APPLICATION ELEMENTS**  
See MPEP chapter 600 concerning utility patent application contents.

**ADDRESS TO:** Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 45]  
(preferred arrangement set forth below)
- Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 11]
4. Oath or Declaration [Total Pages 2]
- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
- i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☒ Power of Attorney  
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \* Small Entity Statement(s) ☐ Statement filed in prior application,  
(PTO/SB/09-12) Status still proper and desired
14. ☒ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☒ Other: Associate Power of Attorney

\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

or ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name	James J. Bitetto				
Address	F. Chau & Associates, LLP 1900 Hempstead Turnpike, Suite 501				
City	East Meadow	State	New York	Zip Code	11554
Country	USA	Telephone	(516) 357-0091	Fax	(516) 357-0092

Name (Print/Type)	James J. Bitetto	Registration No. (Attorney/Agent)	40,513
Signature	<i>James J. Bitetto</i>	Date	3/1/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Assistant Commissioner for Patents  
Washington, D.C. 20231  
Sir:

ATTORNEY DOCKET NO. JP9-1999-0161US (8728-410)

Date: August 8, 2000

Express Mail Label: EL434031630US

Date of Deposit: August 8, 2000

Transmitted herewith for filing is the Patent Application of:

Inventors: Mikio Kurihara, Eisuke Kanzaki

For: TOUCH SENSOR TYPE LIQUID CRYSTAL DISPLAY, AND LIQUID CRYSTAL DISPLAY

Enclosed are: [X] 38 sheets of specification; [X] 1 sheet(s) of Abstract; [X] 6 sheet(s) of claims; [X] 11 sheet(s) of drawing(s);

[X] An assignment of the invention to International Business Machines Corporation with Recordation Form.

[X] Declaration and Power of Attorney.

[X] A certified copy of Japanese application 11-241322 filed 27 August 1999, from which priority under Title 35 USC §119 is claimed.

[X] Associate Power of Attorney.

The filing fee has been calculated as shown below:

(Col. 1)		(Col. 2)	OTHER THAN A SMALL ENTITY	
FOR:	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$ 690.00
TOTAL CLAIMS	14 -20 =	0	X \$18 =	\$ .00
INDEP CLAIMS	5 -3 =	2	X \$78 =	\$ 156.00
__ MULTIPLE DEPENDENT CLAIMS PRESENTED			+ 260 =	
			TOTAL	\$ 846.00

If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

[ ] Checks in the amount of \$\_\_ and \$\_\_ to cover the filing fee(s) and recording fee are enclosed.

[X] Please charge my Deposit Account No. 50-0510/IBM (Yorktown Heights) in the amount of \$846.00

[X] The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 50-0510/IBM (Yorktown Heights). **A duplicate copy of this sheet is enclosed.**

[X] Any additional filing fees required under 37 CFR 1.16.

[X] Any patent application processing fees under 35 CFR 1.17.

Respectfully submitted,

By:

  
James J. Bitetto  
Registration No. 40,513  
Attorney for:  
IBM Corporation  
Intellectual Property Law Dept.  
P.O. Box 218  
Yorktown Heights, NY 10598

Please address all  
correspondence to:

F. CHAU & ASSOCIATES, LLP  
1900 Hempstead Turnpike, Suite 501  
East Meadow, NY 11554  
Tel: (516) 357-0091  
Fax: (516) 357-0092

**CERTIFICATION UNDER 37 C.F.R. § 1.10**

I hereby certify that this Application transmittal and the documents referred to as enclosed are being deposited with the United States Postal Service on this date August 8, 2000 in an envelope as "Express Mail Post Office to Addressee" Mailing Label Number EL434031630US addressed to: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

  
James J. Bitetto

TOUCH SENSOR TYPE LIQUID CRYSTAL DISPLAY,  
AND LIQUID CRYSTAL DISPLAY

BACKGROUND OF THE INVENTION

5      1. Field of the Invention

          The present invention relates to a touch sensor type  
liquid crystal display equipped with a touch sensor function  
on a liquid crystal display panel, and more particularly to  
a liquid crystal display with a resistive membrane touch  
10      sensor.

          2. Description of the Related Art

          Resistive touch membrane sensors are employed to  
provide a way to input or select information displayed on a  
15      display device. Referring to Fig. 13, an example of a  
conventional resistive membrane touch sensor type liquid  
crystal display is shown, which was disclosed in Japanese  
Patent Laid-Open Hei 7 (1995)-84705. In the present  
specification, a touch sensor type liquid crystal display  
20      means one having a touch sensor function added to a liquid  
crystal display panel, whatever mode may be employed.

As shown in Fig. 13, this touch sensor type liquid crystal display 1 includes a touch sensor panel 3 laminated on a liquid crystal display panel 2. The liquid crystal display panel 2 has a structure, which is made by laminating an upper polarizing plate 12, a color filter substrate 13 made of glass, an array substrate 14 made of glass, a lower polarizing plate 15 and a backlight unit 16 from the upper part of the drawing. Peripheral parts of the color filter substrate 13 and the array substrate 14 are sealed with a sealing material 17, and a liquid crystal material is sealed in a space to form a liquid crystal layer 18. Though not shown in Fig. 13, the liquid crystal layer 18 includes spacers for controlling a gap between the color filter substrate 13 and the array substrate 14: typically, a number of spherical members called beads are dispersed in the pixel region. Various improvements have been made for spherical spacers. For example, Japanese Patent Laid-Open Hei 5(1993)-80343 disclosed spherical spacers, which are capable of reducing non-uniformity of the gap and are not foamed at a low temperature.

The touch sensor panel 3 is laminated on the liquid crystal display panel 2 by an adhesive tape 6. The touch sensor panel 3 includes a fixed electrode plate 4 made of glass, and a movable electrode plate 5 made of glass and arranged opposite the fixed electrode plate 4 at a specified interval by using the adhesive tape 6. The fixed electrode plate 4 includes a transparent conductive film 7 made of ITO (indium tin oxide),  $\text{SnO}_2$ , or the like formed on the surface, and the movable electrode plate 5 includes a similar transparent conductive film 8. Grids 9 are disposed between the fixed and movable electrode plates 4 and 5 to prevent unexpected contact therebetween.

In both ends of the fixed and movable electrode plates 4 and 5, electrode terminals 10 are pasted by silver or the like in directions orthogonal to each other. Wires of the electrode terminals 10 formed on the fixed and movable electrode plates 4 and 5 are collected at one place and connected to a flexible substrate 11.

The touch sensor type liquid crystal display became popular remarkably fast. Now, these type of displays can be seen in many places, for example, bank ATMs, ticket machines

at train stations, and so on. Use of the touch sensor type liquid crystal display is not limited to the installed type equipment such as ATM or the like, but application thereof has expanded to a portable or mobile equipment.

5           One of the tasks regarding the mobile equipment is a reduction in weight. This task is also required for the touch sensor type liquid crystal display. One problem for the weight reduction has been the use of a glass substrate, which forms a touch sensor panel.

10           At present, a mainstream type of the touch sensor panel 3 is one, which includes the fixed electrode plate 4 made of glass, and the movable electrode plate 5 made of a plastic film such as PET (polyethylene terephthalate) or the like. However, even for the type having the movable electrode  
15           plate 5 made of a plastic film, a sufficient reduction cannot be made in weight because the fixed electrode plate 4 is made of glass. Consequently, although there are latent demands for fixing the touch sensor panel in a notebook personal computer using, for instance, a liquid crystal  
20           display panel of 13.3 type, practical use thereof has not yet been realized.

As a lighter and thinner touch sensor panel, types having both fixed and movable electrode plates made of plastic films have been known. Widely used among these types is one having a thickness of the plastic film set in a range of 10 $\mu$ m to 3mm, especially in a range of 100 $\mu$ m to 500 $\mu$ m. However, it has been pointed out that the touch sensor type liquid crystal display constructed by laminating the touch sensor panel of this type on the liquid crystal display panel cannot endure long-time use. This is because low rigidity of the touch sensor panel causes a pressing force at the time of touching to be applied to the liquid crystal display panel, and an image characteristic thereof is adversely affected.

The touch sensor type liquid crystal display described in above-mentioned Japanese Patent Laid-Open Hei 7 (1995)-84705 is constructed by eliminating the fixed electrode plate of the touch sensor panel, and providing the function thereof using the color filter substrate of the liquid crystal display panel instead. In the case of this touch sensor type liquid crystal display, a problem similar to the

above may occur if the movable electrode plate is made of a plastic film.

It is an object of the present invention to provide a touch sensor type liquid crystal display, which can endure long-time use is reduced in weight. It is another object of the invention to provide a liquid crystal display panel suitable for used as a touch sensor type liquid crystal display.

#### SUMMARY OF THE INVENTION

To achieve a satisfactory weight reduction, the inventors used a type of display which does not use a glass substrate for a touch sensor panel, and investigated prevention of deterioration of an image characteristic of a liquid crystal display panel. As a result, the inventors discovered that it was effective to improve spacers in the liquid crystal layer of the liquid crystal display panel. Specifically, since the spacers used in the conventional liquid crystal display panel are spherical, contact between the color filter substrate and the array substrate sandwiching the spacers and the liquid crystal layer



provides point- contacts. This point-contact increases  
contact pressure. Also, because of the structure permitting  
movement of the spacers in the liquid crystal layer, the  
display electrode formed on the surface of the color filter  
substrate (or the array substrate) and the orientation film  
formed on the surface of the display electrode can be  
damaged. Consequently, an image characteristic is  
deteriorated.

Thus, it is a task of the present invention to restrict  
spacer movement in a planar direction of the liquid crystal  
display panel. It is another task of the invention to set  
contact between a glass substrate constituting the liquid  
crystal display panel and the spacers to be surface-contact  
by forming the spacer in a columnar shape.

The foregoing task may be achieved by providing a touch  
sensor type liquid crystal display, which comprises: a  
liquid crystal display panel having first and second  
substrates arranged oppositely to each other distanced by a  
specified gap; gap controlling spacers, each of the spacers  
restricting a width of the gap and a spacer movement in a  
planar direction; and a touch sensor added to the liquid

crystal display panel including fixed and movable electrode plates.

A method for restricting movement of the spacers in the planar direction of the liquid crystal display panel, includes use of PEP (Photo Engraving Process). A specific process will be described later, but restriction of the movement can be realized by forming a columnar spacer on a color filter substrate or an array substrate facing a liquid crystal layer by means of PEP. In this case, the spacer is fixed to the color filter substrate or the array substrate, and restricted in its movement in the planar direction of the liquid crystal display panel. Instead of being directly formed on the color filter substrate or the array substrate, the spacer may be formed on a thin film, which is formed on the color filter substrate or the array substrate.

According to the present invention, the liquid crystal display panel and the touch sensor should not be included in the constitutional limitations of the spacer, and a conventionally known constitution can be employed for each. However, the prior art or later-described embodiments of the present invention should not place any constitutional

limitations, and the constitution thereof is also applicable to improved technologies.

5 The gap controlling spacer of the present invention should preferably be formed in a columnar shape. This is because the columnar shape of the spacer causes contact with the color filter substrate or the array substrate to be a surface-contact, and a pressing force can be reduced more compared with the conventional spherical spacer based on point-contact. It should be noted that the effectiveness of the columnar shape is not limited to the case where the movement of the gap controlling spacer is restricted in the planar direction of the liquid crystal display panel. But, the columnar shape of the spacer is only an example of causing contact with the color filter substrate or the array substrate to be a surface-contact, and other shapes causing surface- contact can also be used.

10 The gap controlling spacers of the present invention can be arranged regularly in the planar direction of the liquid crystal display panel. Specifically, the spacer can be formed in a predetermined position in the planar direction of the liquid crystal display panel by using the

aforementioned PEP. This means that the spacers can be arranged regularly in the planar direction according to various needs of the liquid crystal display panel. The conventional spherical spacers were dispersed between the color filter substrate and the array substrate and, thereafter, it was impossible to control positioning thereof in the planar direction of the liquid crystal display panel. According to the present invention, however, positions of the spacers can be controlled, and the spacers can be arranged regularly.

The regular arrangement of the spacers is advantageous in various respects for the touch sensor type liquid crystal display. For example, arrangement of the spacers keeps constant the amount of bending caused by touching the touch sensor panel in any position in the planar direction of the liquid crystal display panel. Accordingly, uneven bending of the liquid crystal display panel can be prevented.

According to the present invention, the regular arrangement of the gap controlling spacers in the planar direction of the liquid crystal display panel means not only a uniform arranging density but also a non-uniform arranging

density may be provided. In other words, the number of times of touching is different from position to position on the surface of the touch sensor panel. For example, the number of times a region A is touched may be larger than that of a region B. Thus, it is effective to set an arranging density of the spacers according to the number of times a region may be touched. For example, by increasing a density of spacers in an often-touched region, the satisfactory function of the spacers in this region can be guaranteed.

According to the invention, it is also effective to set an arranging density of the gap controlling spacers in proportion to a bending amount of the touch sensor panel. In other words, when the same pressing force is applied, a bending amount is increased in the center of the touch sensor panel, and a bending amount of the liquid crystal display panel located below the touch sensor panel is accordingly larger in the center, assuming that no spacers are present in the touch sensor panel. Thus, in this case, it is only necessary to set an arranging density of the gap controlling spacers to be high in the center of the liquid

crystal display panel. However, setting of the arranging  
density of the gap controlling spacers in proportion to the  
bending amount of the touch sensor panel should not be  
construed as limited to only setting the arranging density  
5 in the center high.

One embodiment of the touch sensor type liquid crystal  
display of the present invention may include a liquid  
crystal display panel having array and color filter  
substrates arranged oppositely to each other by  
10 interpolating a liquid crystal layer; and a touch sensor  
panel having movable and fixed electrode plates arranged  
oppositely to each other by a specified gap, these panels  
being laminated together. The touch sensor type liquid  
crystal display of this type is constructed by preparing the  
15 liquid crystal display panel and the touch sensor panel  
which function independently of each other, and laminating  
these to be united.

Other than the foregoing type, the touch sensor type  
liquid crystal display of the present invention may be one  
20 comprising: a liquid crystal display panel having array and  
color filter substrates arranged oppositely to each other by

interpolating a liquid crystal layer; a movable electrode plate serving as a touch sensor arranged oppositely to the color filter substrate by a specified gap; and a conductive film serving as a touch sensor formed on a surface opposite the movable electrode plate of the color filter substrate. This touch sensor type liquid crystal display is constructed by eliminating the fixed electrode plate serving as a touch sensor, and providing this function for the color filter substrate of the liquid crystal display panel instead. Thus, this type is effective for reducing a thickness and weight of the touch sensor type liquid crystal display.

According to the present invention, the touch sensor added to the liquid crystal display panel is inclusive of any modes: not only lamination of the liquid crystal display panel and the touch sensor panel which function independently of each other and formation of the conductive film serving as the touch sensor by using the color filter substrate of the liquid crystal display panel, but also the addition of the function as the touch sensor to the liquid crystal display panel.

Regarding a position of the gap controlling spacer of the invention, consideration should preferably be given to a relationship with a position of the grid located in the touch sensor so as to prevent the pressing of touching from adversely affecting the liquid crystal display panel. For example, since a pressing force generated by touching the touch sensor surface is received by the grid, by setting a position of the grid to be coincident with that of the gap controlling spacer, it is possible to reduce bending of the liquid crystal display panel caused by application of the pressing force on the gap controlling spacer.

For the grid, Japanese Patent Laid-Open Hei 9 (1997)-293429 disclosed a grid condition capable of preventing entry breaking even when touching is made by a low load. This condition can also be employed.

The spacer of the present invention may be arranged in a black matrix region of the liquid crystal display panel. The black matrix is a region, which does not give any direct effects on image display. Accordingly, even if the black matrix is damaged, influence given to an image



characteristic will be smaller compared with the case where damage occurs in the image display region.

A manufacturing method suited for the touch sensor type liquid crystal display of the present invention comprises: a  
5 step of coating a photosensitive resin on a color filter substrate, performing ultraviolet-ray exposure by using a photomask to cure the resin and removing an uncured portion to form a gap controlling spacer on the color filter substrate; a sealing material coating step of coating a  
10 sealing material like a frame in a peripheral part of the color filter substrate or an array substrate; an adhering step for adhering the other substrate to the color filter substrate or the array substrate coated with the coating material in the sealing material coating step with a  
15 specified gap by applying pressure to the same; a liquid crystal injecting step for injecting a liquid crystal material in the gap between the two substrates adhered to each other in the adhering step; and a step of laminating together a liquid crystal display panel obtained by the  
20 above steps and a touch sensor panel. This manufacturing method is characterized in that formation of the gap

controlling spacer is carried out by PEP, and a method  
available in the prior art can be employed for a specific  
content of this step. The spacers can also be formed on the  
array substrate, or on both. Furthermore, for the touch  
5 sensor, other than the lamination of the separately prepared  
touch sensor panel, a conductive film can be formed as a  
touch sensor on the color filter substrate of the liquid  
crystal display panel, and a movable electrode plate can be  
arranged as a touch sensor oppositely to a surface having  
10 the conductive film formed thereon.

Regarding the columnar spacer, the prior art is  
presented in Japanese Patent Publication Hei 7(1995)-50273  
and Japanese Patent Laid-Open Hei 3(1991)-15824, each of  
which discloses the use of the spacers for liquid crystal  
15 display panel alone. However, these do not disclose a  
possibility of using the spacers in combination with the  
touch sensor, and did not point out the problem of image  
characteristic deterioration caused by the conventional  
spherical spacer when the liquid crystal display was used in  
20 combination with the touch sensor.

These and other objects, features and advantages of the present invention will become apparent from the following detailed description of illustrative embodiments thereof, which is to be read in connection with the accompanying drawings.

#### **BRIEF DESCRIPTION OF DRAWINGS**

The invention will be described in detail in the following description of preferred embodiments with reference to the following figures wherein:

Fig. 1 is a cross-sectional view showing a touch sensor type liquid crystal display according to a first embodiment of the present invention;

Fig. 2 is a detailed sectional view showing the touch sensor type liquid crystal display of the first embodiment;

Fig. 3 is a view illustrating an arrangement of a gap controlling spacer for a single pixel according to the first embodiment;

Fig. 4 is a view illustrating an arrangement of the gap controlling spacer in a liquid crystal display panel according to the first embodiment;

Fig. 5 is a sectional view showing a state of touching a touch sensor panel;

Fig. 6 is a perspective view showing a constitution of the touch sensor panel;

5 Figs. 7a-e are views illustrating a manufacturing process of the touch sensor type liquid crystal display of the first embodiment;

10 Fig. 8 is a constitutional view showing in section a touch sensor type liquid crystal display according to a second embodiment of the invention;

Fig. 9 is a detailed sectional view showing the touch sensor type liquid crystal display of the second embodiment;

15 Fig. 10 is a view illustrating an arrangement of a gap controlling spacer in a liquid crystal display panel according to the second embodiment;

Fig. 11 is a view showing another form of a gap controlling spacer;

Fig. 12 is a view showing another arrangement of the gap controlling spacer; and

20 Fig. 13 is a constitutional view showing in section a conventional touch sensor type liquid crystal display.

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The preferred embodiments of the present invention will be described with reference to the accompanying drawings wherein like numerals represent the same or similar elements throughout the Figs. A brief description of the reference numerals includes: 1 touch sensor type liquid crystal display, 2 liquid crystal display panel, 3 touch sensor panel, 4 fixed electrode plate, 5 movable electrode plate, 6 adhesive tape, 7 transparent conductive film, 8 transparent conductive film, 9 grid, 10 electrode terminal, 11 flexible substrate, 12 upper polarizing plate, 13 color filter substrate, 14 array substrate, 15 lower polarizing plate, 16 reflecting plate, 17 sealing material, 18 liquid crystal layer, 19 gap controlling spacer (spacer), 20 pen, 21 ultraviolet curing resin, 131 black matrix, 132 color filter, 133 protective film, 134 common electrode, 135 orientation film, 141 under coated layer, 142 gate insulating film, 143 pixel electrode, 144-1 to 144-2 gate line, 145 thin film transistor, 146 orientation film

Fig. 1 is a section of a touch sensor type liquid crystal display according to a first embodiment of the present invention; Fig. 2 is a detailed sectional view thereof; Fig. 3 is a view illustrating an arrangement of a gap controlling spacer for a single pixel; Fig. 4 is a view illustrating an arrangement of the gap controlling spacer; Fig. 5 is a sectional view showing a state of touching a touch sensor panel; Fig. 6 is a perspective view showing a constitution of the touch sensor panel; and Fig. 7 is a view illustrating a manufacturing process of the touch sensor type liquid crystal display of the first embodiment. In Figs. 1 to 7, the same elements as the elements in the conventional touch sensor type liquid crystal display of Fig. 13 are indicated by the same reference numerals.

As shown in Fig. 1, a touch sensor type liquid crystal display 1 of the present invention is constructed by laminating a touch sensor panel 3 on a liquid crystal display panel 2.

The liquid crystal display panel 2 has a structure, which is made by laminating an upper polarizing plate 12, a color filter substrate 13, an array substrate 14, a lower

polarizing plate 15 and a backlight unit 16 from the upper part of the drawing. Peripheral parts of the color filter substrate 13 and the array substrate 14 are sealed with a sealing material 17, and a liquid crystal material is sealed in a space thereby formed to form a liquid crystal layer 18. Columnar spacers are provided in this space.

The touch sensor panel 3 is laminated on the liquid crystal display panel 2 by an adhesive tape 6. The touch sensor panel 3 includes a fixed electrode plate 4, and a movable electrode plate 5 arranged oppositely to the fixed electrode plate 4 at a specified interval by using the adhesive tape 6. A transparent conductive film 7 made of ITO (indium tin oxide),  $\text{SnO}_2$  or the like is formed on the surface of the fixed electrode plate 4, and a similar transparent conductive film 8 is formed on the surface of the movable electrode plate 5. A grid 9 is disposed between the fixed and movable electrode plates 4 and 5 to prevent unexpected contact therebetween.

On both ends of the fixed and movable electrode plates 4 and 5, electrode terminals 10 are pasted by silver or the like in directions orthogonal to each other. The wires of

the electrode terminals 10 are collected at one place and connected to a flexible substrate 11.

As shown in Fig. 2, an under coated layer 141 is formed on a main surface of the array substrate 14, and a gate insulating film 142 is formed on the under coated layer 141. On the gate insulating film 142, a pixel electrode 143 is formed to apply an electric field to the liquid crystal layer 18. In the gate insulating film 142, gate electrode wires, so-called gate lines 144-1 and 144-2, are formed. Then, a gap controlling spacer 19 (simply referred to as a spacer 19, hereinafter) made of an insulating material is formed on the gate line 144-1 to maintain a gap, i.e., a cell gap, between the array substrate 14 and the color filter substrate 13.

The spacer 19 is formed on the array substrate 14 to restrict a spacer movement in a planar direction, and brought into surface-contact with the color filter substrate 13 because of its square columnar shape. Accordingly, even if a force is applied to the liquid crystal display panel 2, a possibility of damaging an orientation film 135 and a common electrode 134 on the color filter substrate 13 will



be extremely small. There should be no particular limitation placed on a shape of the spacer 19. Other than the square columnar shape, a polygonal columnar shape such as a cylindrical shape, a triangle pole shape or the like can be used as long as it can function as a spacer for the present invention.

To be formed on the gate line 144-1 as in the case of the embodiment, a width of the spacer 19 is decided depending upon a width of the gate line 144-1. In this case, the spacer 19 is present in a black matrix 131 region as described later. Thus, a width of the spacer 19 may be decided depending upon a width of the black matrix 131. A height of the spacer 19 may be decided depending upon a thickness of the liquid crystal layer 18. Preferably, the height should be set in a range of 3 to 7 $\mu$ m, especially in a range of 4 to 6 $\mu$ m.

On the main surface of the color filter substrate 13, black matrices 131 are formed in positions opposite the gate lines 144-1 and 144-2 and a thin film transistor 145. Further, color filters 132 are formed in positions adjacent to the black matrices 131 and not opposite the gate lines

144-1 and 144-2, and so on. On the black matrices 131 and the color filters 132, a common electrode 134 is formed by including a protective film 133.

On the main surface of the array substrate 14,  
5 orientation films 146 made of polyimide are formed for the purpose of orienting a liquid crystal so as to cover the thin film transistor 145 and the pixel electrodes 143.

Likewise, on the color filter substrate 13, an orientation  
10 film 135 is formed on the common electrode 134. An orientation film 146 is also formed on a side face of the spacer 19.

With the touch sensor type liquid crystal display 1,  
the spacer 19 is formed on the gate line 144-1 of the array  
substrate 14, in other words, in the black matrix 131 region  
15 of the color filter substrate 13. Thus, even if application of an excessive force to the liquid crystal display panel 2 causes an upper end surface of the spacer 19 to damage the orientation film 135 and the common electrode 134 on the color filter substrate 13, since these parts are adhesive or  
20 black matrices 131 which are not displayed as images, no deterioration will occur in image performance of the liquid

crystal display panel 2. If the spacer 19 is formed in a region where the thin film transistor 145 and the color filter 132 are present other than the black matrix 131, the thin film transistor 145 or the color filter 132 will not be able to function satisfactorily. Therefore, in the present invention, the spacer 19 should preferably be formed in the black matrix 131 region. However, the present invention will not eliminate a possibility of forming the spacer 19 in a region other than the black matrix 131 region, for instance, in the region of the color filter 132.

Positions of arranging the spacer 19 and the grid 9 of the touch sensor panel 3 are coincident with each other. Thus, when the surface of the touch sensor panel 3 is touched, a pressing force generated by this touching is received by the grid and, by further receiving the pressing force by the spacer 19, unexpected bending of the liquid crystal display panel can be controlled. It should be understood, however, that coincidence in the arranging positions between the spacer 19 and the touch sensor panel 3 does not mean one-to-one correspondence between all the spacers 19 and the grids 9. In other words, the number of

spacers 19 and the number of grids 9 are not always coincident with each other. There may be a case where the number of spacers 19 is larger than that of grids 9, or vice versa. Thus, no one-to-one correspondence is established between the spacers 19 and the grids 9. Desirable setting for strength is that the number of spacers 19 is larger than that of grids 9, and arranging positions of the grids 9 and the spacers 19 coincide with each other, because all the pressing forces from the grids 9 are received by the spacers 19. Another effective setting may be that not only arranging positions of the grids 9 and the spacers 19 are completely coincident with each other, but also the grids 9 are present in regions in the vicinity, for instance, in the regions having sectional areas 3 to 5 times larger than those of the spacers 19.

Fig. 3 is an expanded view showing one pixel in the liquid crystal display panel 2. The spacer 19 is formed in a position adjacent to the thin film transistor 145. Fig. 4 is a view showing an arrangement of spacers 19 in the liquid crystal display panel 3 (only a part is shown). Positions for forming the spacers 19 are circled. Since the spacers

19 are uniformly arranged in accordance with the embodiment,  
it is possible to control bending of the color filter  
substrate 13 or the array substrate 14 irrespective of a  
place of the liquid crystal display panel 2 when the touch  
5 sensor panel 3 is touched.

An operation of the touch sensor type liquid crystal  
display 1 thus constructed is conducted as follows.  
Specifically, as shown in Figs. 5 and 6, when the surface of  
the touch sensor panel 3 is pressed by a pen 20, the movable  
10 electrode plate 5 is partially bent to be brought into  
contact with the fixed electrode plate 4. As shown in Fig.  
5, a point of contact is a point for distributing voltages  
applied to the electrode terminals 10 respectively formed in  
the fixed and movable electrode plates 4 and 5, and voltage  
15 reductions of these plates are measured by opposing  
electrodes. By using a processing circuit including an A/D  
converter to process the amounts of these voltage  
reductions, a coordinate of the point of contact can be  
obtained.

20 Next, a method for forming spacers 19 will be described  
by referring to Fig. 7.

First, in a resist coating step of Fig. 7(a), an ultraviolet curing resin 30 made of an photosensitive acrylic resin is coated (resist-coated) on the array substrate 14 having the pixel electrodes formed thereon to have a thickness of about 5 microns (resist coating). Depending upon a structure or the like of the color filter substrate, a polyimide resin may be used instead of the acrylic resin.

Then, the process moves to a patterning step of forming spacers 19 shown in Fig. 7(b). In this patterning step, first, ultraviolet-ray exposure is performed by using a photomask. This ultraviolet-ray exposure causes a negative development, in other words, a place irradiated with a light to be cured. Accordingly, a basic structure of each of spacers 19 is obtained. Needless to say, a basic structure can also be obtained by performing the ultraviolet-ray exposure to cause a positive development. Subsequently, an uncured portion is removed by means of an alkali phenomenon, the array substrate 14 is washed by water and dried, and then a resin cured at about 230 °C. is burned thereto. By

this burning, the resin for forming the spacer 19 is sufficiently cured.

After the end of the burning, an orientation film is coated. The coating of the orientation film should be carried out at this stage, because there is a possibility that formation of the spacer 19 after the orientation film is formed will disturb orientation.

Then, the process moves to a step of coating a sealing material 17 shown in Fig. 7(c). In accordance with the embodiment, a sealing material 17 using a thermosetting resin made of an epoxy resin is formed like a frame in a peripheral part of the array substrate 14. This sealing material 17 is coated to have a slightly larger height than that of a necessary cell gap by using, for instance, a dispenser system. At this stage, a liquid crystal injection port must be provided for injecting a liquid crystal.

Then, the process moves to an assembling step of Fig. 7(d). In this assembling step, the color filter substrate 13 formed up to the orientation film is pressed to the array substrate 14 having the spacers 19 and the sealing material 17 formed thereon, and these two substrates are firmly fixed

to each other. More specifically, after the color filter substrate 13 is pressed, a load is applied according to a substrate dimension. For example, in the case of a substrate of 360mm ~ 460mm, a load slightly lower than 1t is applied, and then heating is performed at about 150 °C.

This heating melts and gelatinizes the sealing material 17. Then, a contained curing material causes curing reaction to form a cured resin. In this way, the sealing material 17 is firmly fixed to the color filter substrate 13, and the color filter substrate 13 and the array substrate 14 are jointed to each other while a cell gap, i.e., a gap decided by the spacer 19, is maintained.

Lastly, the process moves to a step of injecting a liquid crystal material shown in Fig. 7(e). First, a hermetically sealed region formed by the sealing material 17 is placed in a vacuum state, and then a liquid crystal material is injected through the liquid crystal material injection port. The injected liquid crystal material can be sufficiently spread in the hermetically sealed region, as it has low viscosity. Then, a series of steps come to an end



after sealing the liquid crystal injection port with a sealing material.

Fig. 8 is a sectional view showing in section a touch sensor type liquid crystal display according to a second embodiment of the present invention; Fig. 9 is a detailed sectional view thereof; and Fig. 10 is a view illustrating an arrangement of a gap controlling spacer. In Figs. 8 to 10, the same elements as the elements of the first embodiment are indicated by the same reference numerals.

Prior to description of the second embodiment, main differences between the first and second embodiments will be explained. First, in the first embodiment, the liquid crystal display panel and the touch sensor panel are provided independently of each other, although these are laminated together. On the other hand, in the second embodiment, the fixed electrode plate constituting the touch sensor panel is abolished by utilizing a color filter substrate of a liquid crystal display panel as a fixed electrode plate for a touch sensor. Secondly, in the first embodiment, the spacers are formed on the array substrate. In the second embodiment, however, spacers are formed on the

color filter substrate. Thirdly, in the first embodiment, the spacers are uniformly arranged. In the second embodiment, however, a density of arranging spacers is higher toward a center of the liquid crystal display panel. The second embodiment will now be described based on these differences.

In Fig. 8, a liquid crystal display panel 2 includes an upper polarizing plate 12, a color filter substrate 13, an array substrate 14, a lower polarizing plate 15 and a backlight unit 16. The upper polarizing plate 12 is disposed on a movable electrode plate 5.

The color filter substrate 13 also functions as, for instance the fixed electrode plate 4 of the touch sensor shown in Fig. 1. Specifically, a transparent conductive film 7 made of ITO (indium tin oxide),  $\text{SnO}_2$  or the like is formed on the upper surface of the color filter substrate 13 and formed on its upper surface. Being spaced by a specified amount from the color filter substrate 13 (fixed electrode plate 4), the movable electrode 5 having a transparent conductive film 8 is provided by an adhesive tape 6. Between the color filter substrate 13 (fixed

electrode plate 4) and the movable electrode plate 5, grids 9 are formed to prevent unexpected contact therebetween.

As shown in Fig. 9, on a main surface of the color filter substrate 13 (fixed electrode plate 4), black matrices 131 are formed in positions opposite gate lines 144-1 and 144- 2 and a thin film transistor 145. Also, color filters 132 are formed in positions adjacent to the black matrices 131 and not opposite the gate lines 144-1 and 144-2 or the like. A common electrode 134 is formed on the black matrices 131 and the color filters 132 by interpolating a protective film 133. Then, a spacer 19 is formed above the common electrode 134 in a position corresponding to each of the black matrices 131 to maintain a gap between the color filter substrate 13 (fixed electrode substrate 4) and the array substrate 14.

This spacer 19 is fixed to the color filter substrate 13, and brought into surface-contact with the array substrate 14 having a square columnar shape. Accordingly, even if a force is applied to the liquid crystal display panel 2, a possibility of damaging an orientation film 146 and a pixel electrode 143 on the array substrate 14 will be

extremely small. It should be noted that a shape of the spacer 19 should not be limited to a square columnar shape as in the case of the first embodiment. For a dimension of the spacer 19, the specifications described above with reference to the first embodiment can apply.

With the touch sensor type liquid crystal display 1 constructed in the foregoing manner, since the spacer 19 takes the same position as that in the case of the first embodiment when seen from a plane, the second embodiment provides the same effects as those provided by the first. A positional relationship between the spacers 19 and the grids 9 is also the same. In the second embodiment, however, since the fixed electrode plate 4 can be abolished by utilizing the color filter substrate 13 as the fixed electrode plate 4 for the touch sensor instead, a thickness and weight of the touch sensor type liquid crystal display can be reduced. Moreover, the abolition of the fixed electrode plate 4 is effective for preventing deterioration of an optical characteristic.

With the touch sensor type liquid crystal display 1 of the second embodiment, as shown in Fig. 10, a density of

spacers 19 is higher toward a center of the liquid crystal display panel 2 (only a part is shown). There is a structural reason for this higher density. Specifically, the amount of bending is larger toward the center of the liquid crystal display panel when the touch sensor is touched and, hence, to deal with the bending, more spacers 19 are disposed in the center having a larger bending amount.

Other constitutional elements and a manufacturing method of the second embodiment are the same as those of the first embodiment, and thus description thereof will be omitted.

In the first and second embodiments that have been described, the liquid crystal material is driven by using the thin film transistor based on the active matrix system. Driving can also be performed by using other systems such as a direct driving system and a beam address system. Color displaying is performed by using the color filter in the first and second embodiments. Instead of using the color filter, however, a two-color pigment can be contained in the liquid crystal material.

In the first embodiment, the PET film is used for the fixed electrode plate 4. Glass can be used instead, depending on a specific purpose. In the case of using the glass, however, weight-reduction and thinning of the touch sensor type liquid crystal display may not be sufficient. Thus, a flexible material such as a PET film should preferably be used.

The spacers 19 are formed on the array substrate 14 in the first embodiment, and the spacers 19 are formed on the color filter substrate 13 in the second embodiment. But spacers 19 can be formed on both sides of the array and color filter substrates 14 and 13. In this case, care must be taken to make a sum total of heights of the spacers formed on the array and color filter substrates 14 and 13 coincident with a gap, i.e., a cell gap, between these substrates. For example, as shown in Fig. 11, each height of spacers 19a and 19b respectively formed on the array and color filter substrates 14 and 13 is set to be  $\frac{1}{2}$  of a cell gap. In this case, since the spacers 19a and 19b are respectively fixed to the array and color filter substrates 14 and 13, even if a load is applied in a planar direction,

only contact surfaces of the spacers 19a and 19b are rubbed by each other. Accordingly, any damage can be prevented from being given to the array and color filter substrates 14 and 13.

5           The spacers are uniformly arranged in the first embodiment, and a density of the spacers is larger toward the center of the liquid crystal display panel in the second embodiment. As an example of regularly arranging spacers, an arrangement like that shown in Fig. 12 is included in the  
10           embodiment of the present invention. Specifically, in the case of the touch sensor type liquid crystal display where regions indicated by A and B in Fig. 12 are touched more frequently than other regions, it is effective to set densities of spacers 19 to be higher in the regions A and B  
15           than that in other regions. The first and second embodiments have been described by taking an example of the device of the type including the backlight arranged in the backside of the liquid crystal display panel. But the embodiments can also be applied to a device of a reflection  
20           type including a film of a high reflectance arranged in the backside. In this case, the film having a high reflectance

should be arranged in a portion where the backlight unit 16 is arranged.

As apparent from the foregoing, the present invention provides the touch sensor type liquid crystal display, which can endure long-time use by achieving a weight reduction, and preventing deterioration of an image characteristic of the liquid crystal display panel.

Having described preferred embodiments of a touch sensor type liquid crystal display, and liquid crystal display (which are intended to be illustrative and not limiting), it is noted that modifications and variations can be made by persons skilled in the art in light of the above teachings. It is therefore to be understood that changes may be made in the particular embodiments of the invention disclosed which are within the scope and spirit of the invention as outlined by the appended claims. Having thus described the invention with the details and particularity required by the patent laws, what is claimed and desired protected by Letters Patent is set forth in the appended claims.



**WHAT IS CLAIMED IS:**

1. A touch sensor type liquid crystal display  
comprising:

a liquid crystal display panel having first and second  
5 substrates arranged oppositely to each other by a specified  
gap;

gap controlling spacers, each of which restricts a  
width of the gap and a spacer movement in a planar  
direction; and

10 a touch sensor added to the liquid crystal display  
panel including fixed and movable electrode plates.

2. The touch sensor type liquid crystal display  
according to claim 1, wherein said gap controlling spacers  
15 are regularly arranged in a planar direction of the liquid  
crystal display panel.

3. The touch sensor type liquid crystal display  
according to claim 2, wherein arranged densities of said gap  
20 controlling spacers are set according to the number of times  
of touching the touch sensor.

4. The touch sensor type liquid crystal display according to claim 2, wherein an arranged density of said gap controlling spacers is high in a center of the liquid crystal display panel.

5

5. A touch sensor type liquid crystal display comprising:

a liquid crystal display panel having array and color filter substrates arranged oppositely to each other by a specified gap;

10

a gap controlling spacer for restricting a width of the gap and a spacer movement in a planar direction;

a touch sensor added to the liquid crystal display panel including fixed and movable electrode plates; and

15

a grid arranged between the fixed and movable electrode plates,

wherein arranging positions of said gap controlling spacer and said grid are coincident with each other.

20

6. The touch sensor type liquid crystal display according to claim 5, said display being constructed by

laminating together said liquid crystal display panel having the array and color filter substrates arranged oppositely to each other by interpolating a liquid crystal layer, and a touch sensor panel having the movable and fixed electrode plates arranged oppositely to each other by a specified gap.

7. The touch sensor type liquid crystal display according to claim 6, wherein said movable and fixed electrode plates are made of plastic films.

8. The touch sensor type liquid crystal display according to claim 5, wherein said array and color filter substrates of the liquid crystal display panel are arranged oppositely to each other by interpolating a liquid crystal layer, said movable electrode plate serves as a touch sensor arranged oppositely to the color filter substrate by a specified gap, and a conductive film is provided to serve as a touch sensor formed on a surface opposite the movable electrode plate of the color filter substrate.

9. The touch sensor type liquid crystal display according to claim 8, wherein said movable electrode plate is made of a plastic film.

5 10. A touch sensor type liquid crystal display comprising:

a liquid crystal display panel having first and second substrates arranged oppositely to each other by a specified gap;

10 a gap controlling spacer formed in a columnar shape for restricting a width of the gap; and

a touch sensor added to the liquid crystal display panel including movable and fixed electrode plates.

15 11. The touch sensor type liquid crystal display according to claim 10, wherein said gap controlling spacer is arranged in a black matrix region of the liquid crystal display panel.

20 12. A touch sensor type liquid crystal display comprising:

a liquid crystal display panel having first and second substrates arranged oppositely to each other by a specified gap;

a touch sensor added to the liquid crystal display panel including movable and fixed electrode plates; and

a gap controlling spacer for restricting a width of the gap,

wherein said gap controlling spacer is brought into surface-contact with one selected from the first and second substrates, the gap therebetween being restricted by the gap controlling spacer.

13. A liquid crystal display comprising:

a liquid crystal display panel having first and second substrates arranged oppositely to each other by a specified gap; and

gap controlling spacers, each of which restricts a width of the gap and a spacer movement in a planar direction,

wherein arranged densities of said gap controlling spacers are not uniform.

14. The liquid crystal display according to claim 13, wherein an arranged density of said gap controlling spacers is high in a center of the liquid crystal display panel.

JP9-1999-0161 (8728-410)

TOUCH SENSOR TYPE LIQUID CRYSTAL DISPLAY,

AND LIQUID CRYSTAL DISPLAY

ABSTRACT OF THE DISCLOSURE

5

A touch sensor type liquid crystal display is disclosed to provide a touch sensor type liquid crystal display which can endure long-time use while achieving a weight reduction. The touch sensor type liquid crystal display includes: a  
10 liquid crystal display panel 2 having an array substrate 14 and a color filter substrate 13, which are arranged oppositely to each other by interpolating a liquid crystal layer 18; and a touch sensor panel 3 having a movable  
15 electrode plate 4 and a fixed electrode plate 5, which are arranged oppositely to each other by a specified gap. These panels 2 and 3 are laminated together. A gap controlling spacer 19 is fixed in the array substrate 14 to restrict a spacer movement in a planar direction.

FIG.1

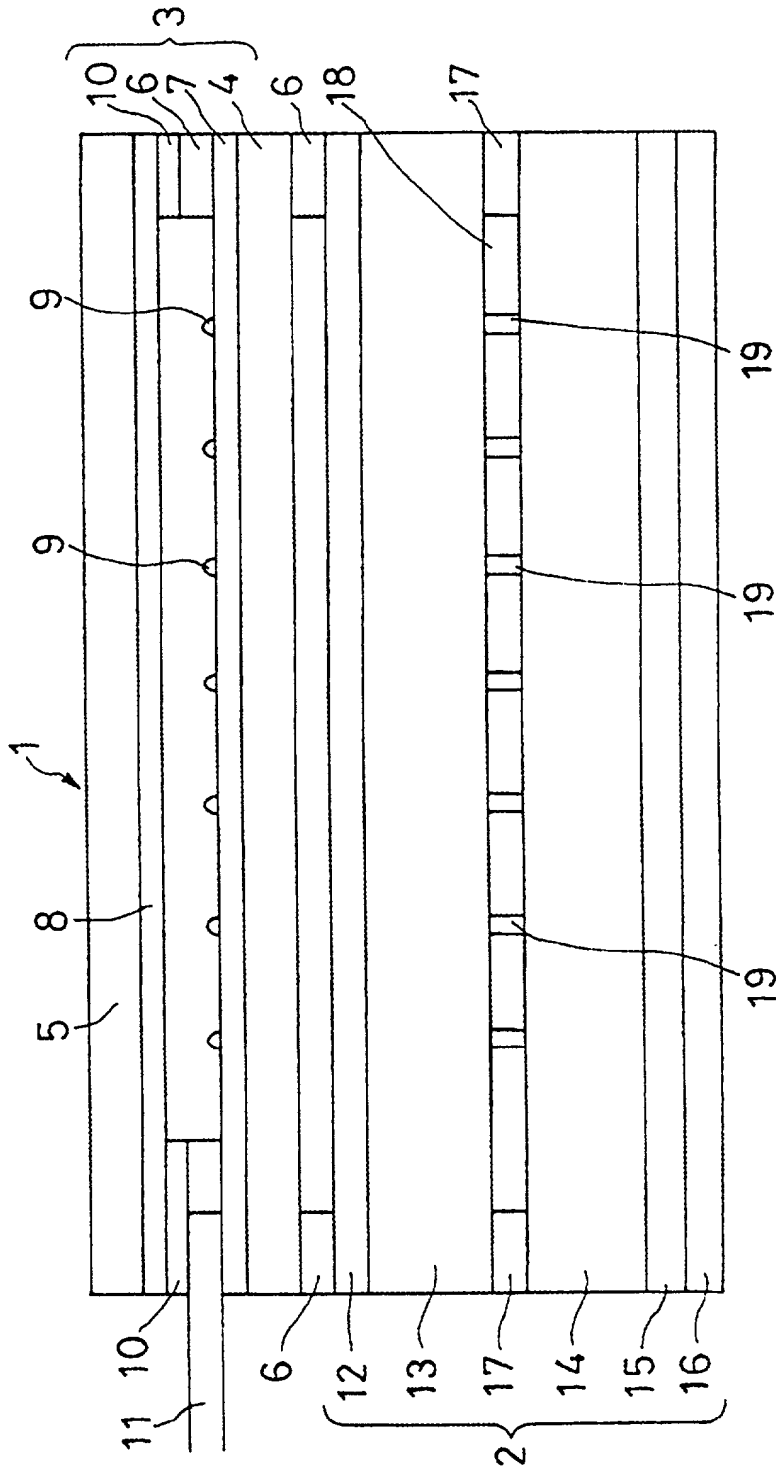




FIG. 2

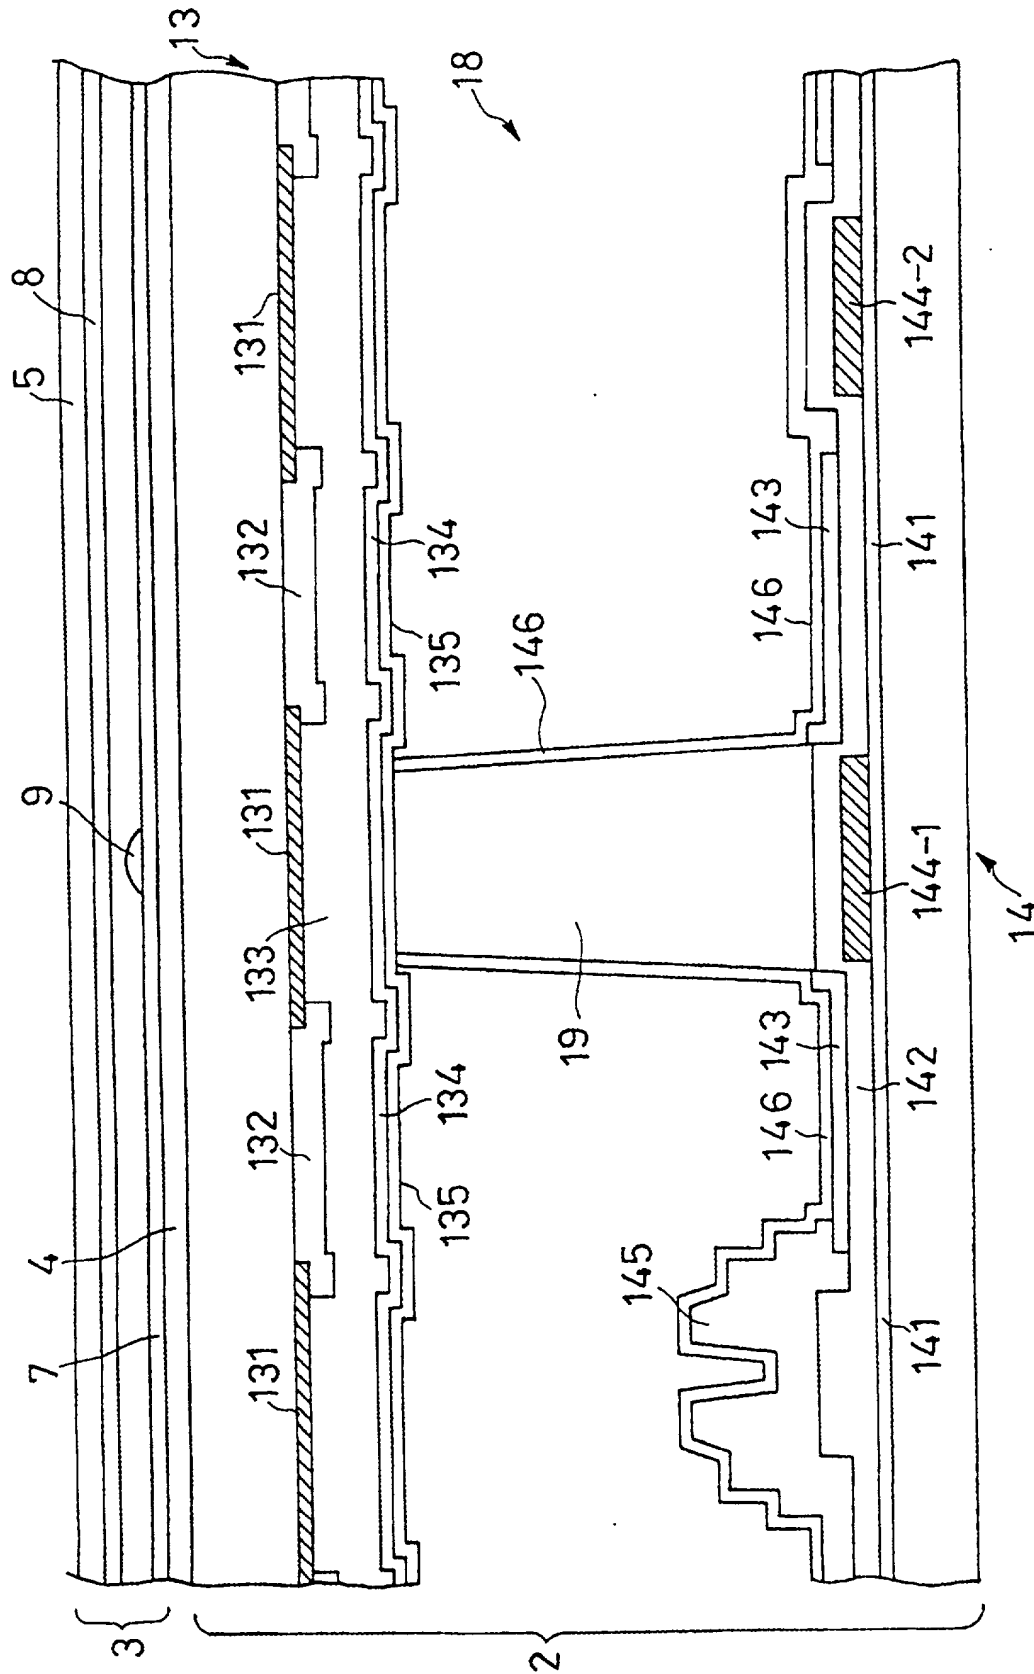


FIG. 3


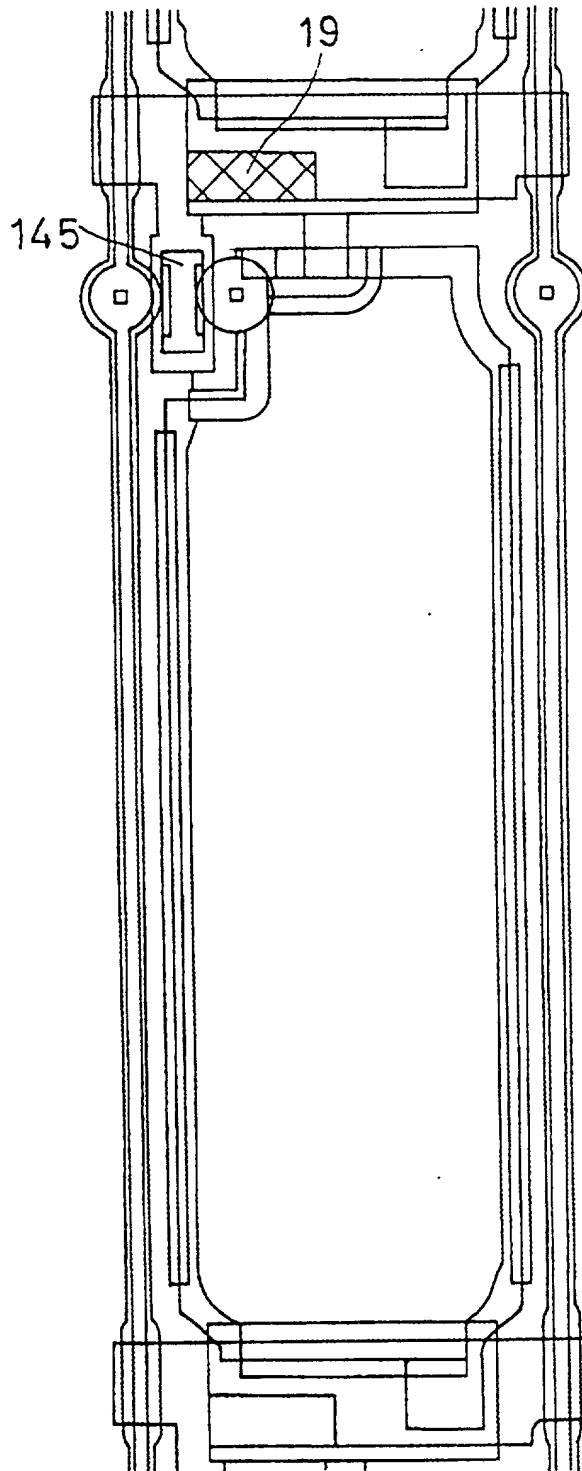


FIG. 4

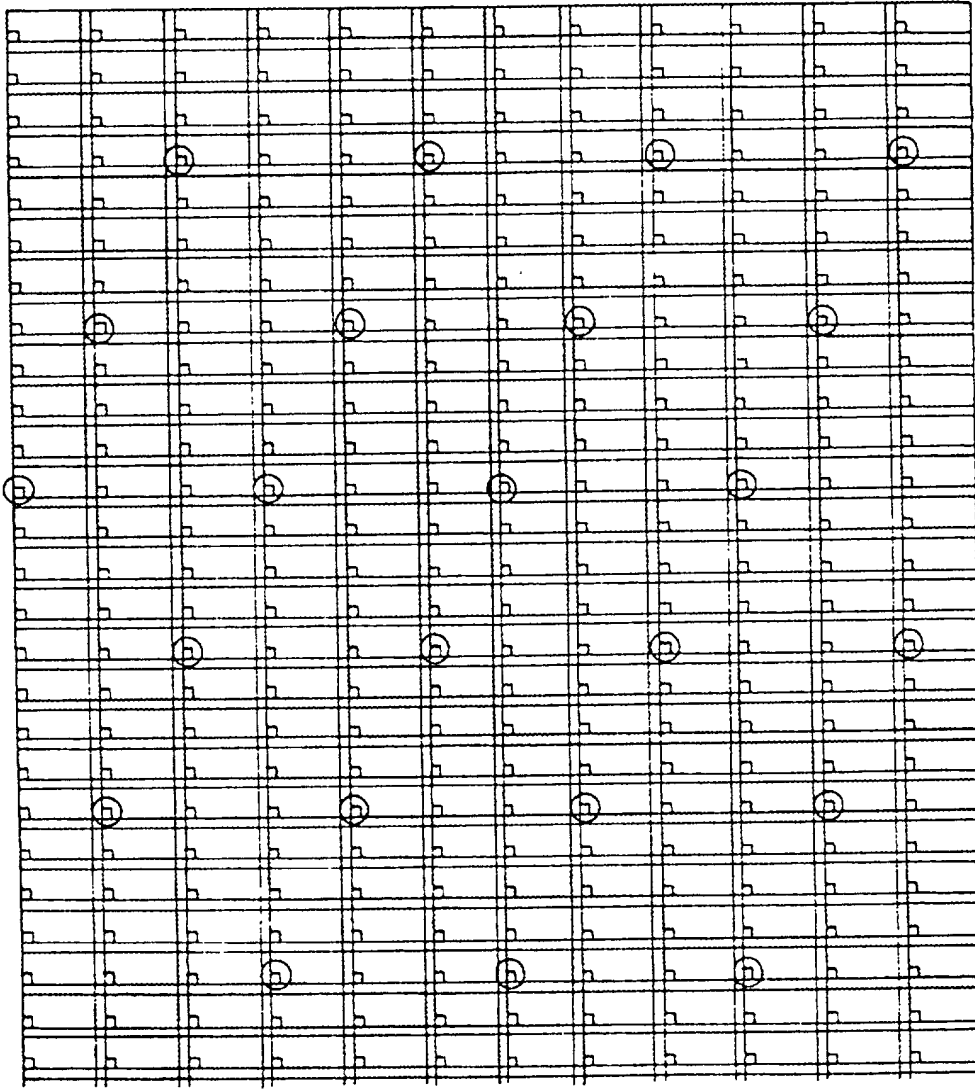

○ : POSITIONS OF ARRANGING SPACERS 19

FIG. 5

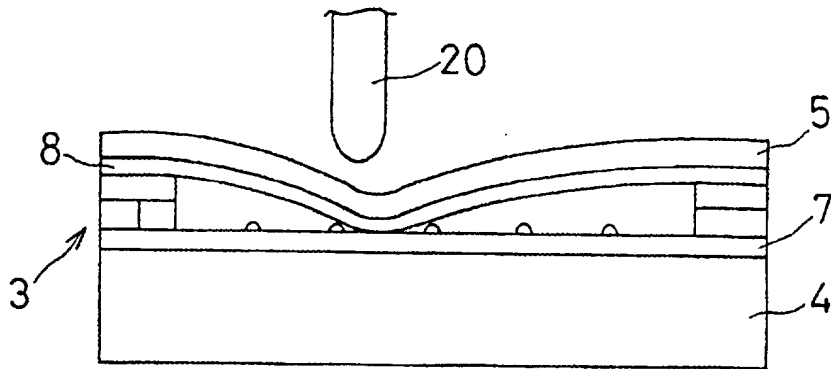


FIG. 6

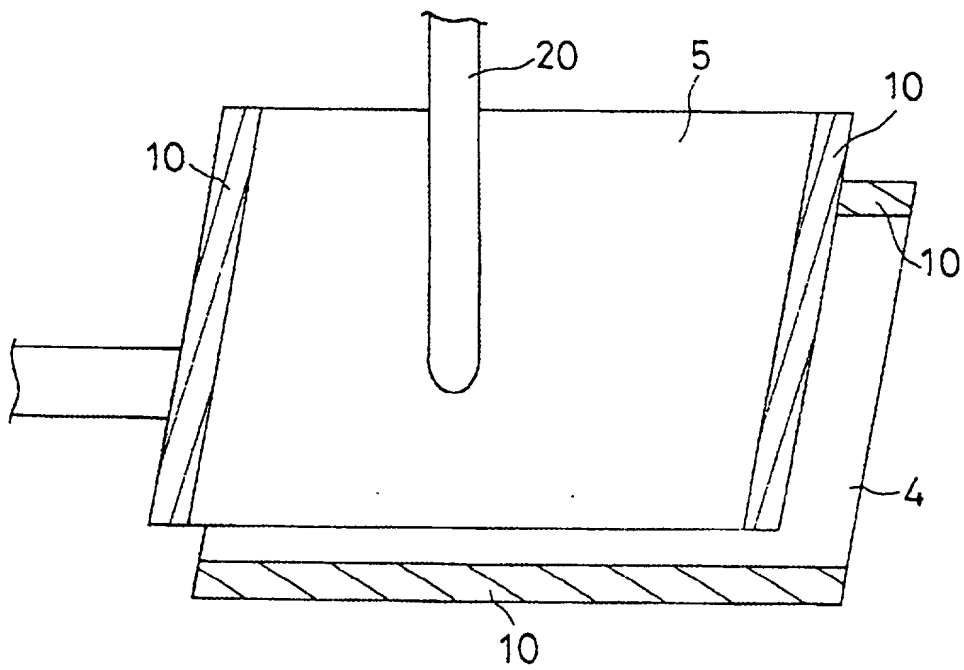


FIG. 7

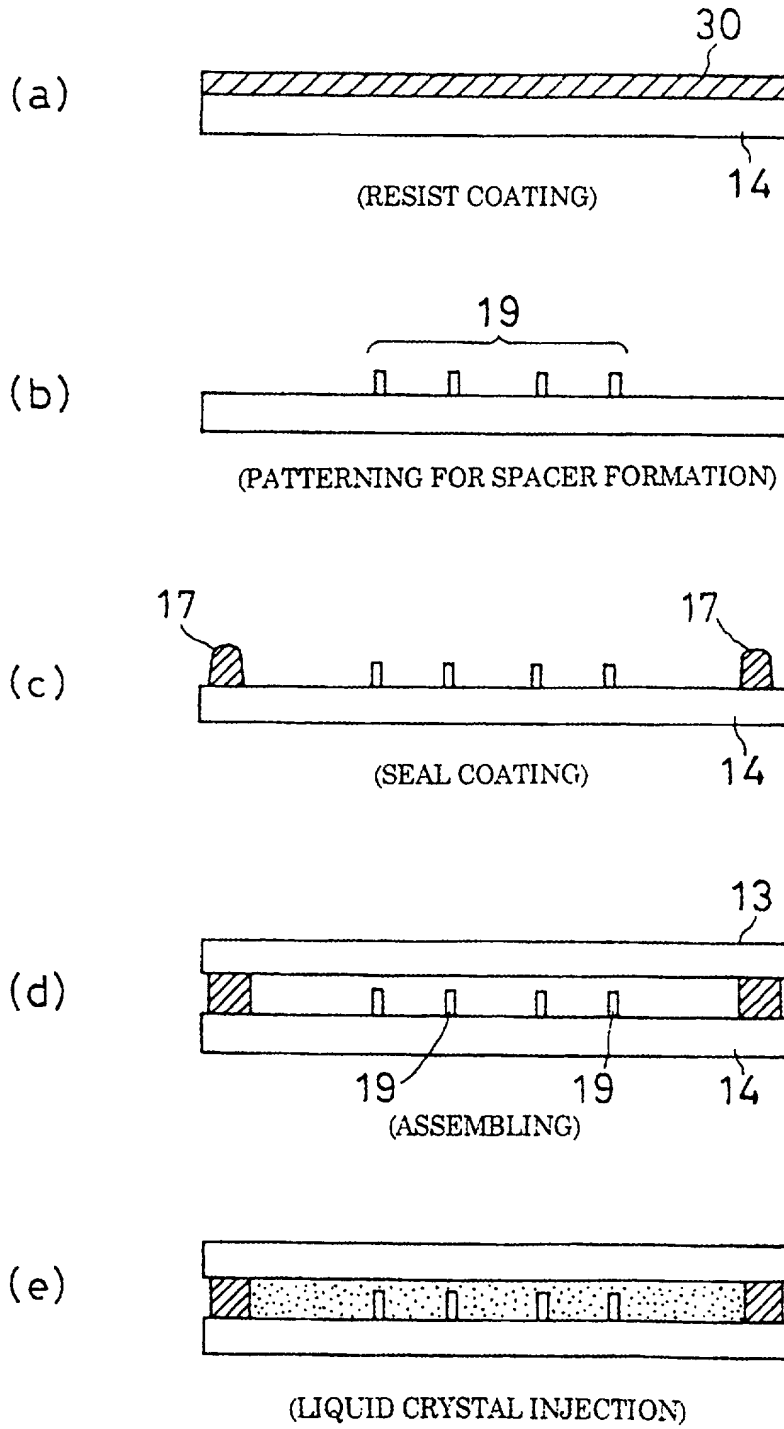


FIG. 8

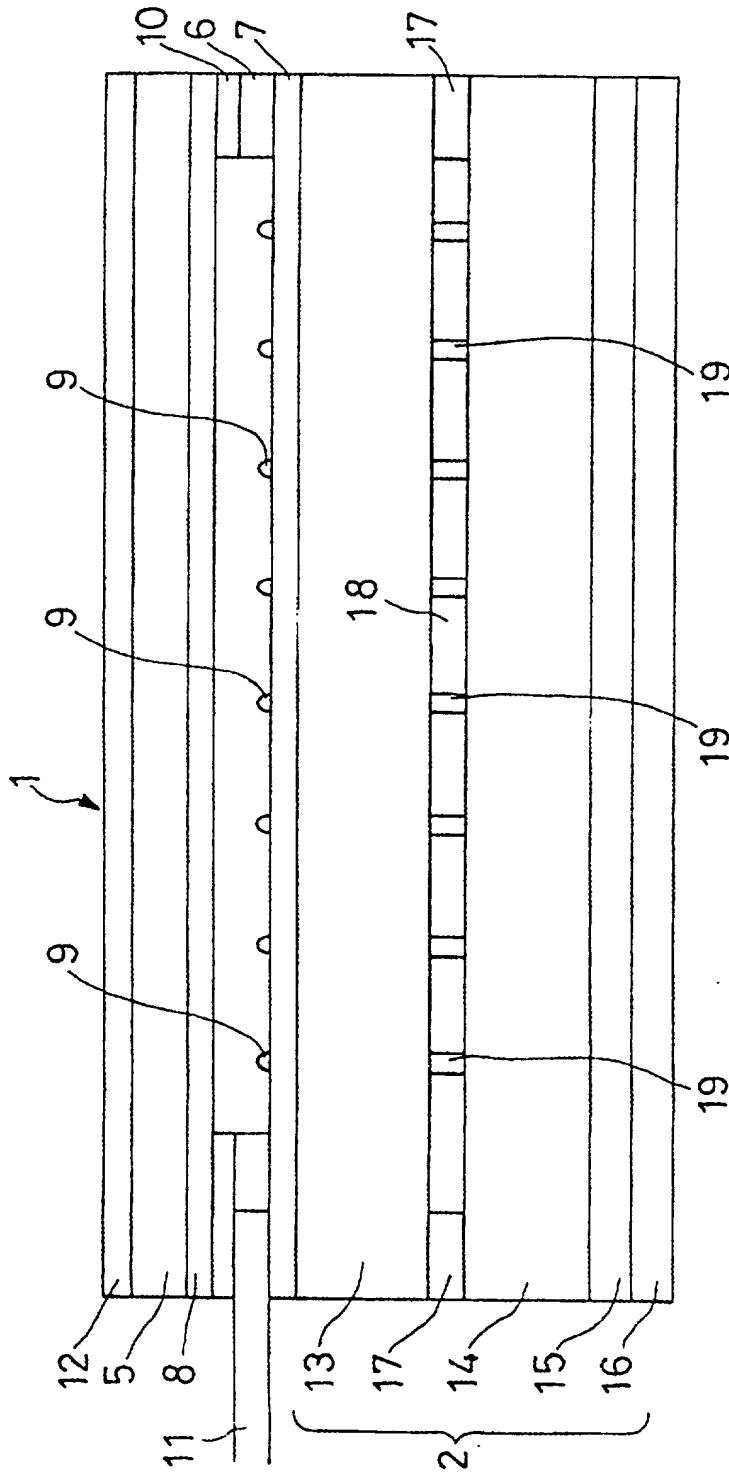


FIG. 9


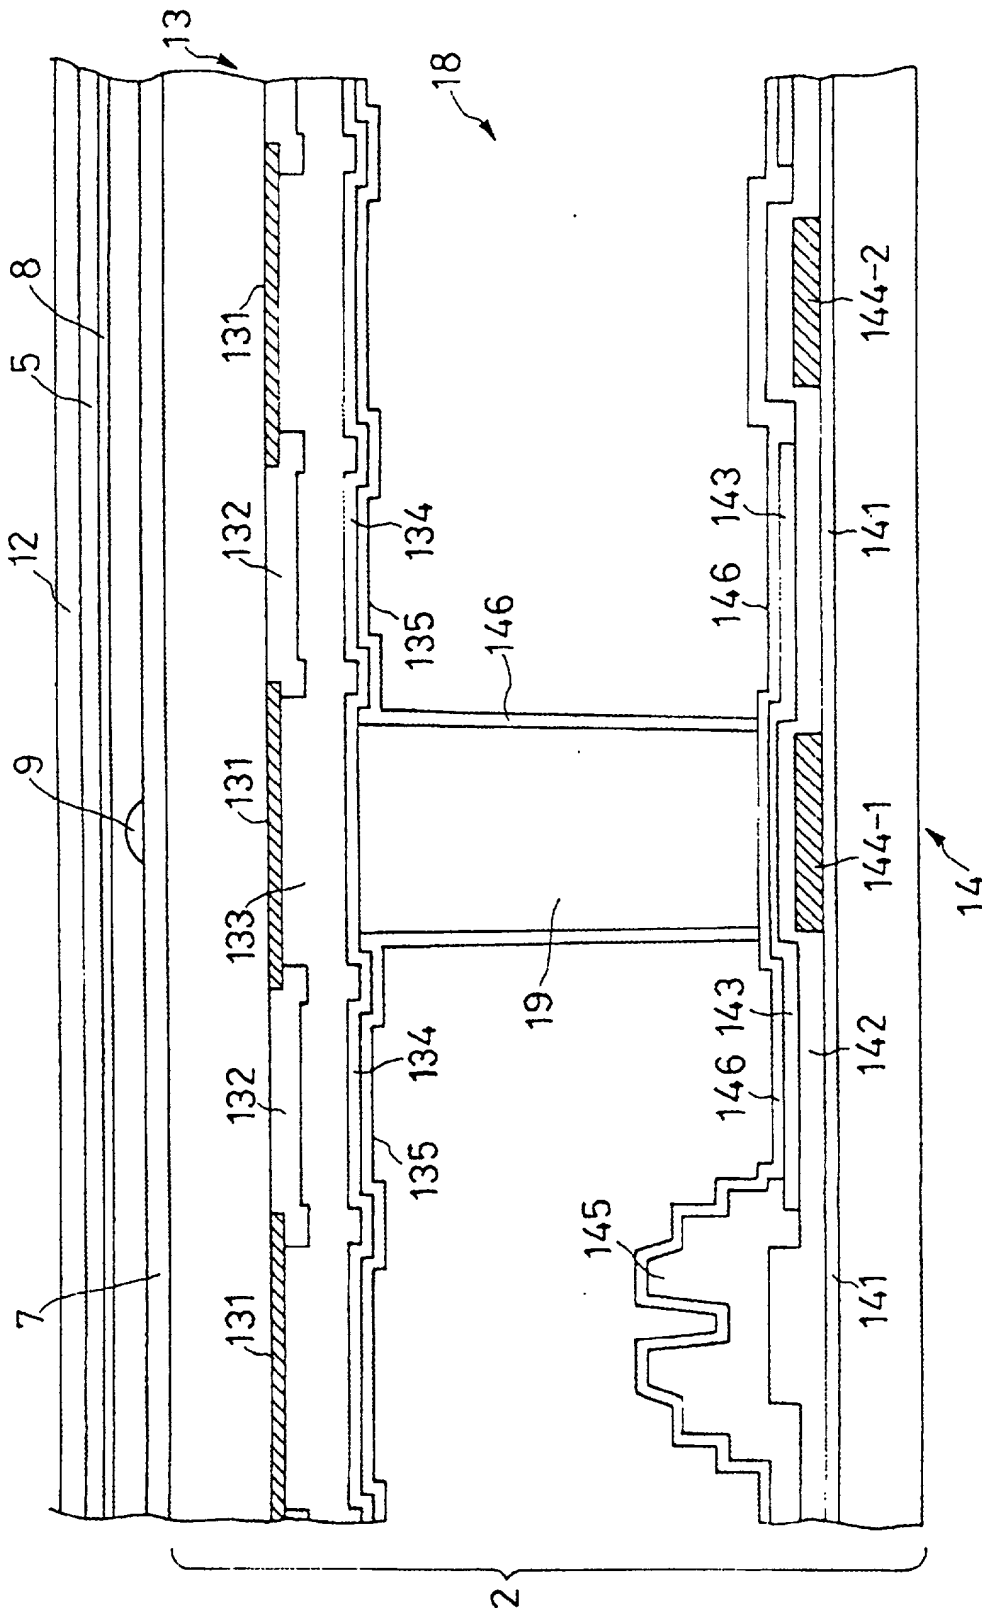


FIG. 10

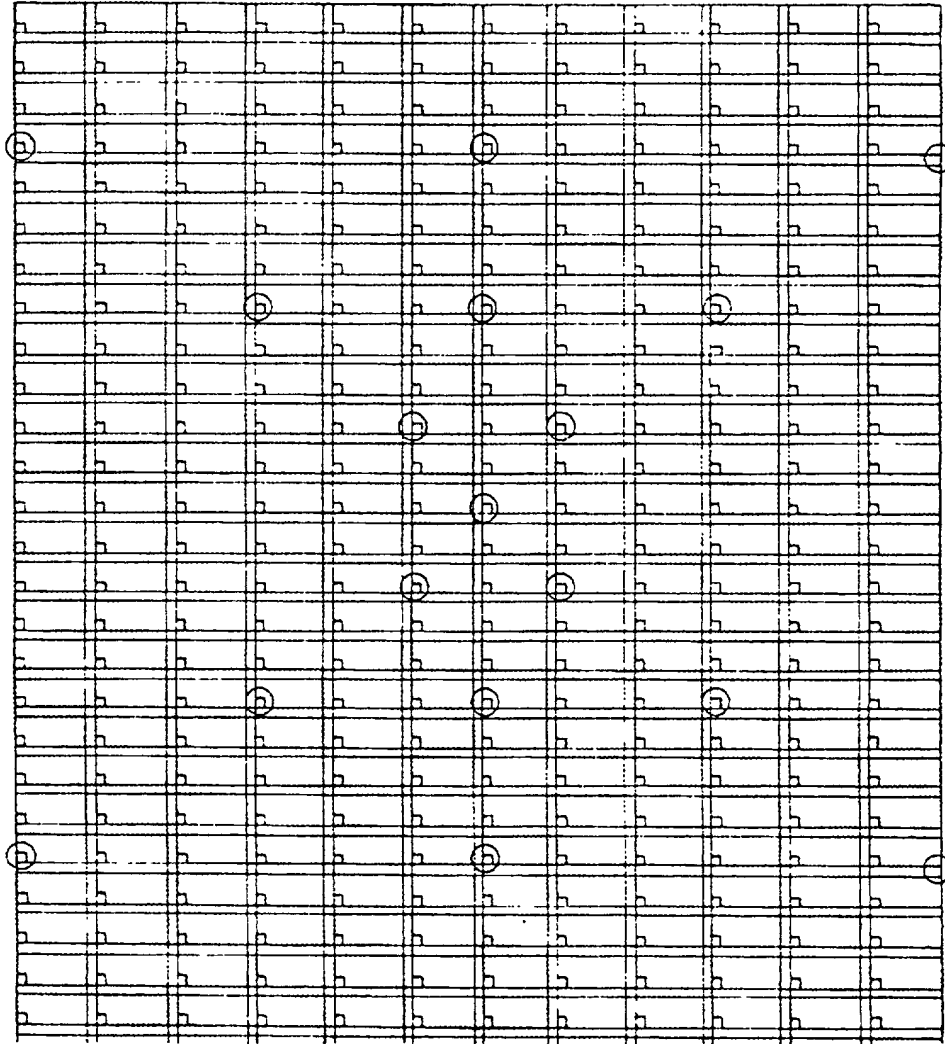

○ : POSITIONS OF ARRANGING SPACERS 19



FIG. 11



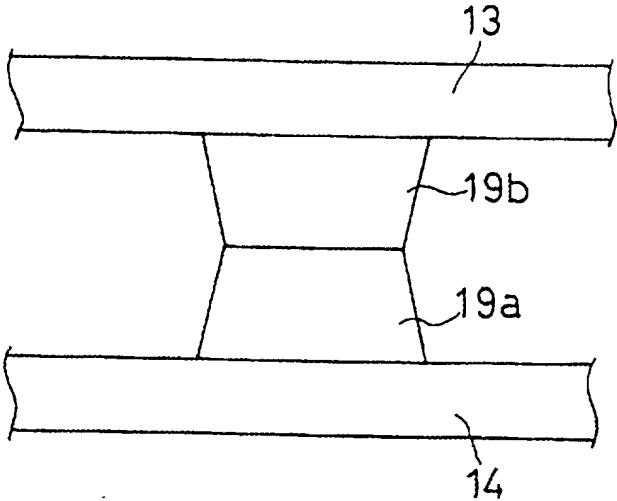


FIG. 12

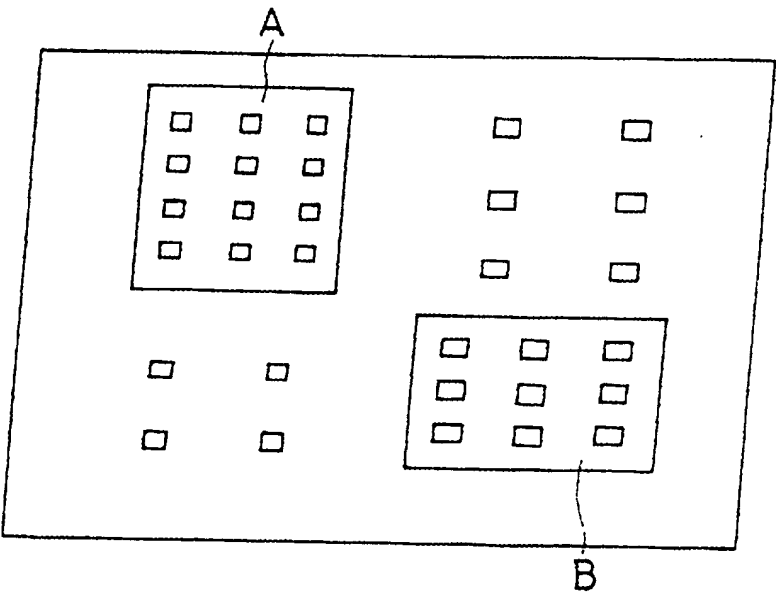

□ : POSITIONS OF ARRANGING SPACERS 19

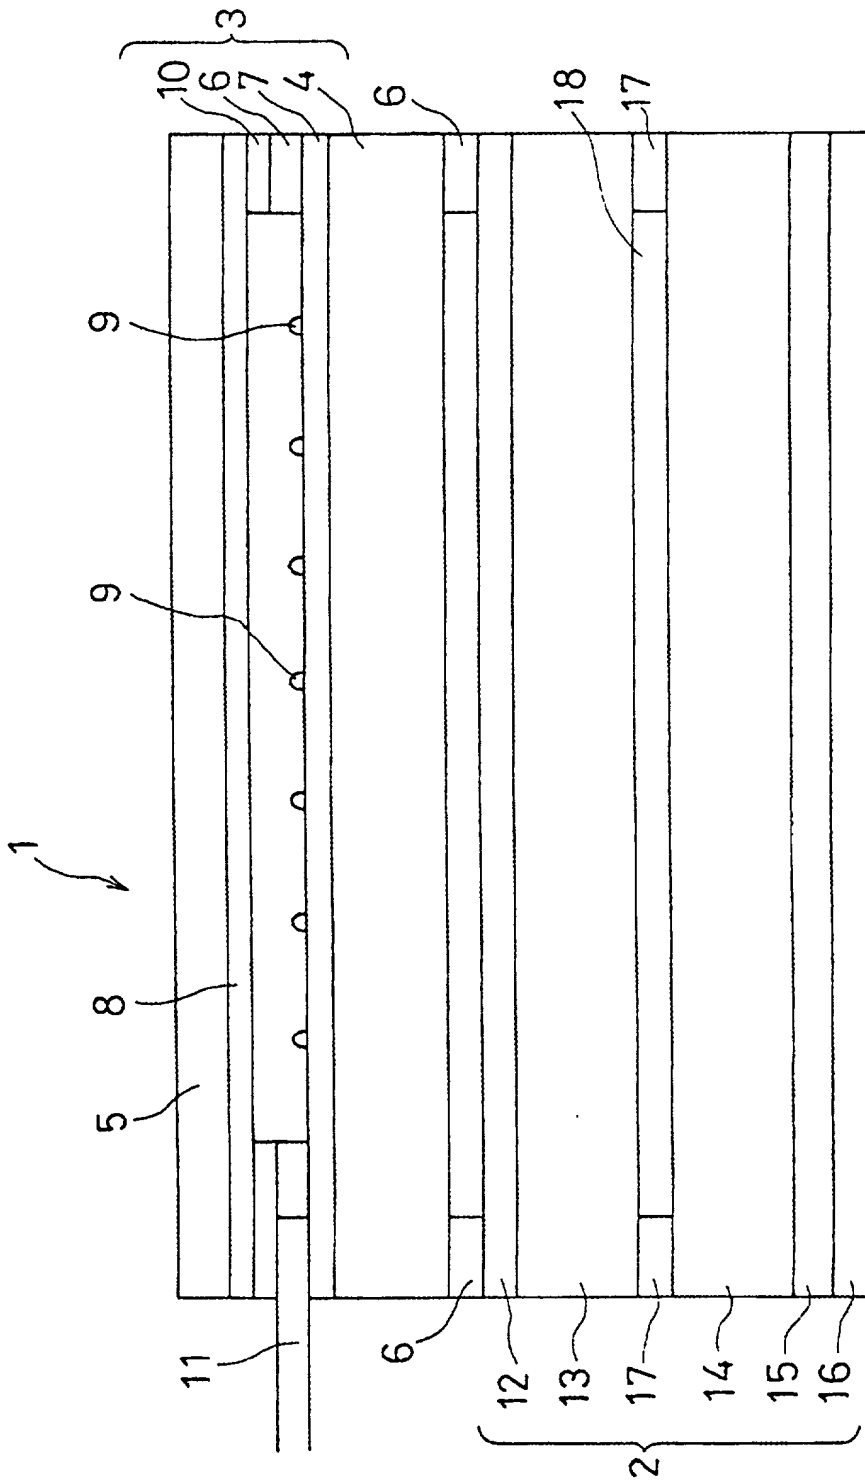

**DECLARATION**

AS A BELOW NAMED INVENTOR, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe that I am the original, first and sole (*if only one name is listed below*), or an original, first and joint inventor (*if plural names are listed below*), of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**TITLE: TOUCH SENSOR TYPE LIQUID CRYSTAL DISPLAY, AND LIQUID CRYSTAL DISPLAY**

the specification of which either is attached hereto or indicates an attorney docket no. JP9-1999-0161US1 (8728-410), or:

☐ was filed in the U.S. Patent & Trademark Office on \_\_\_\_\_ and assigned Serial No. \_\_\_\_\_,

☐ and (*if applicable*) was amended on \_\_\_\_\_,

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability and to the examination of this application in accordance with Title 37 of the Code of Federal Regulations §1.56. I hereby claim foreign priority benefits under Title 35, U.S. Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below any foreign applications for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

11-241322	JAPAN	27 August 1999	<b>Priority Claimed:</b>
(Application Number)	(Country)	(Day/Month/Year filed)	Yes [X] No [ ]
			Yes [ ] No [ ]
(Application Number)	(Country)	(Day/Month/Year filed)	

I hereby claim the benefit under Title 35, U.S. Code, §120 of any United States application(s), or §119(e) of any United States provisional application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of Title 35, U.S. Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, The Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)
-----------------------------	---------------	--

(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)
-----------------------------	---------------	--

I hereby appoint the following attorneys: MANNY W. SCHECTER, Reg. No. 31,722; LAUREN C. BRUZZONE, Reg. 35,082; TERRY J. ILARDI, Reg. 29,936; CHRISTOPHER A. HUGHES, Reg. No. 26,914; EDWARD A. PENNINGTON, Reg. No. 32,588; JOHN E. HOEL, Reg. No. 26,279; JOSEPH C. REDMOND, Jr., Reg. No. 18,753; WAYNE L. ELLENBOGEN, Reg. No. 43,602; STEPHEN C. KAUFMAN, Reg. No. 29,551; JAY P. SBROLLINI, Reg. No. 36,266; DAVID M. SHOFI, Reg. No. 39,835; ROBERT M. TREPP, Reg. No. 25,933; LOUIS P. HERZBERG, Reg. No. 41,500; DANIEL P. MORRIS, Reg. No. 32,053; DOUGLAS W. CAMERON, Reg. No. 31,596; LOUIS J. PERCELLO, Reg. No. 33,206; and PAUL J. OTTERSTEDT, Reg. No. 37,411; and MARIAN UNDERWEISER, Reg. No. 46,134; each of them of INTERNATIONAL BUSINESS MACHINES CORPORATION, Thomas J. Watson Research Center, P.O. Box 218, Yorktown Heights, New York 10598; to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith and with any divisional, continuation, continuation-in-part, reissue or re-examination application, with full power of appointment and with full power to substitute an associate attorney or agent, and to receive all patents which may issue thereon, and request that all correspondence be addressed to:

Frank Chau, Esq.  
F. CHAU & ASSOCIATES, LLP  
1900 Hempstead Turnpike, Suite 501  
East Meadow, New York 11554  
Tel.: 516-357-0091

I HEREBY DECLARE that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 U.S. Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST OR SOLE INVENTOR: Mikio Kurihara Citizenship JAPAN  
Inventor's signature: Mikio Kurihara Date: 25 JUL 2000  
Residence: Yamato-shi, Japan  
Post Office Address: 8-7-11, Minami-Rinkan, Yamato-shi, Kanagawa-Ken, JAPAN

FULL NAME OF SECOND JOINT INVENTOR: Eisuke Kanzaki Citizenship JAPAN  
Inventor's signature: Eisuke Kanzaki Date: 25 JUL 2000  
Residence: Fujisawa-shi, JAPAN  
Post Office Address: 34-2-908, Fujisawa, Fujisawa-shi, Kanagawa-ken, JAPAN

FULL NAME OF THIRD JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_  
Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence: \_\_\_\_\_  
Post Office Address: \_\_\_\_\_

FULL NAME OF FOURTH JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_  
Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence: \_\_\_\_\_  
Post Office Address: \_\_\_\_\_

FULL NAME OF FIFTH JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_  
Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence: \_\_\_\_\_  
Post Office Address: \_\_\_\_\_

FULL NAME OF SIXTH JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_  
Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence: \_\_\_\_\_  
Post Office Address: \_\_\_\_\_

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**APPLICANT(S):** Eisuke Kanzaki and Mikio Kurihara

**SERIAL NO.:** Unassigned

**FILED:** Concurrently herewith

**FOR:** TOUCH SENSOR TYPE LIQUID CRYSTAL DISPLAY,  
AND LIQUID CRYSTAL DISPLAY


**ASSOCIATE POWER OF ATTORNEY**

Please recognize **FRANK CHAU**, Reg. No. 34,136; **JAMES J. BITETTO**, Reg. No. 40,513; **FRANK V. DeROSA**, Reg. No. 43,584; **GASPARE J. RANDAZZO**, Reg. No. 41,528; and **SUSAN PAIK**, Reg. No. 46,347, each of them of **F. CHAU & ASSOCIATES, LLP**, 1900 Hempstead Turnpike, Suite 501, East Meadow, New York 11554 as associate attorneys in the above-mentioned application, with full power to prosecute said application, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

Telephone calls should be made to Frank Chau by dialing (516) 357-0091.

All written communications are to be sent to Frank Chau, Esq.,  
**F. Chau & Associates, LLP, 1900 Hempstead Turnpike, Suite 501, East Meadow, New York 11554.**

International Business Machines  
Corporation  
T.J. Watson Research Center  
Route 134 and Kitchawan Road  
Yorktown Heights, New York 10598

  
Manny W. Schecter  
Registration No. 31,722  
Marian Underweiser  
Registration No. 46,134  
Attorney for Applicant(s)